# Temperature sensors that can take the heat

An outstanding temperature sensor performance is characterised by:

The element

- The ability to react fast and precise
- The packaging

## 1 Elements

Depending on the equipment different element technologies can be applied:

- RTD (Pt100/Pt1000) for standardised signals and high accuracy the RTD's are a perfect choice
- Thermistors (NTC/PTC) the optimum solution for OEM equipment in large volumes
- Thermocouples a well-known technology for high temperatures and heavy-duty applications

If required the temperature sensor can also be delivered with a transmitter to get an analogue signal:

- 4–20 mA
- Voltage
- Ratio metric

# 2 The ability to react fast

and precise Special care has been put into the design of the sensor in relation to the reaction time. A specially developed sensor element fixture ensures contact between the element and the housing material in order to secure a fast heat transfer from the media to the sensor element. On top of this the sensor construction ensures minimum

radiation of heat, which results in a

temperature of the media.

measurement very close to the actual

# 3 Packaging

The sensor design offers long-life stability through:

- High shock and vibration stability
- High enclosure grade (special version up to IP69K)
- Flexible choice of sensor material:
- Stainless steel (AISI 316)
- Brass
- Gold plated contacts to secure flawless signal

# **Engineering Tomorrow**



Danfoss is a leading global player within the development and production of mechanical and electronic products and controls. Since 1933, our extensive know-how has made modern life easier and we continue to break new ground within our core business areas.

Every day, more than 250,000 items are produced at 70 factories in 25 countries. Impressive as these figures are, we are most proud of the way our dedicated employees apply the highquality components in customer solutions, adding value to the end products. Building strong partnerships is of great importance to us, because it is purely by understanding our customers' needs that we can meet the expectations of tomorrow.

Learn more at ia.danfoss.co.uk

### **Danfoss Limited - Industrial Automation**

Capswood · Oxford Road, Denham · Bucks · UB9 4LH · United Kingdom · ia@danfoss.com Tel.: 0870 241 7030 · Fax: 0870 241 7035

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved





This is also true in Industrial Automation, a Danfoss entity dedicated to focusing on the industrial world of today. Through us, you gain access to the entire Danfoss pool of technologies, with special emphasis on sensors and controls.

We offer safer, more reliable and more efficient solutions in a close cooperation based on firm values.



# **Temperature sensors** designed for customer **needs**

A temperature sensor overview



# Unsurpassed expertise makes all the difference

When you choose Danfoss as your supplier of temperature sensors, you choose a dedicated partner who truly understands the challenges in your specific application. Years of experience allow us to provide you with advanced solutions that will meet your every requirement in terms of

range of standard devices or team up with our worldwide sensor experts to design a customised solution for your

### £62,≇ Transportation

The increasing global focus on

Danfoss accommodate this by

Marine equipment

Railway equipment

environmental and safety legislation

optimising product functions and

with the new demands. Our wide

sensor range comprises solutions for:

Mobile hydraulic equipment

calls for more control and automation.

Marine, Mobile Hydraulics

and Railways

### Machine and equipment

# Heating and sanitation

## Industrial Hydraulics, AirCompressors, Water Pumps and Industrial Engines

Within machines and equipment the temperature sensor specifications depend on the specific application. Close cooperation with customers has allowed us to develop dedicated specifications, allowing you to comply sensor solutions for:

- (MBT 3270/5250 series)

- Industrial engines
- Industrial hydraulics

▋ᢒᡭᢁ


# Sterilisers, Autoclaves, Boiler and Boiler Room Equipment Energy efficiency and safety are

frequent challenges in heating and sanitation applications. The answer is highly reliable and accurate measurements, which is achieved by using specialised sensors. Bearing the • Water pumps and air compressors above equipment in mind we have developed dedicated temperature sensors for:

o: 🍐

\*@•

- Sterilisers and autoclaves
- Boiler and boiler room equipment

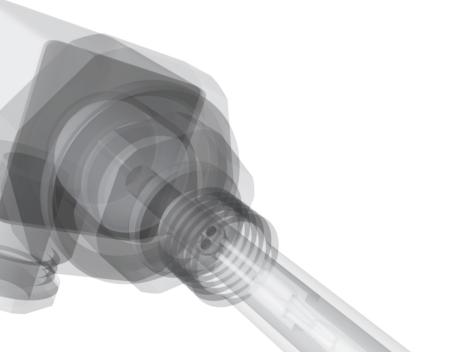



# Wind Turbines and Electric Power

One of the most distinct global challenges now and in the future is how to produce energy in a both efficient and environmentally friendly way. In cooperation with some of the leading manufacturers of process and energy equipment, Danfoss has developed – and is continuously refining – solutions for:

- Wind turbines
- Gen sets



ТҮРЕ	STANDARD		MBT 3270		
SEGMENTS	Transportation		රිේ		
	Heating and sanitation				
	Machine and equipment		<b>.</b>		
	Energy				
CHARACTERISTICS	Pt 100/Pt 1000		•		
	NTC/PTC		•		
	Thermocouple				
	Transmitter				
	Transmitter as option				
	Measuring insert		Fixed		
	Medium temperature	°C	-50 − 300 °C		
		°F	-58 – 572 °F		
	Enclosure		IP65 (NEMA 4)		
	Material protection tube		W.no. 1.4571 (AISI 316 Ti)		
	Reaction time t <sub>0.5</sub> in water (sec)		Stainless steel 1.5 s Brass 1.2 s		
	Marine approvals				

TEMPERATURE SENSORS OVERVIEW								
		8						
MBT 3252	MBT 3560	MBT 153	MBT 5250	MBT 5252	MBT 5260			
රිං	රිේ		<b>£</b> 68	£	Ĵ			
OI		OF		4				
	<b>P</b>		₽₽€	of	₽₽€			
	*	*						
•		•	•	•	•			
		•	•	•				
mA	mA / V DC			mA				
Fixed	Fixed	Fixed	Changeable	Changeable	Fixed			
-50 – 200 °C	-50 – 200 °C	-50 − 200 °C	-50 − 200 °C	-50 – 400 °C	-50 − 200 °C			
-58 – 392 °F	-58 – 752 °F	-58 – 392 °F						
<del>.</del>		-			+			
IP65 (NEMA 4)	IP65/IP67 (NEMA 4/NEMA 6)	IP67 (NEMA 4)	IP65 (NEMA 4)	IP65 (NEMA 4)	IP65 (NEMA 4)			
W.no. 1.4571 (AISI 316 Ti)								
3 s	10 s	1 s	9 s	12 s	2 s			
			•	•	•			